

# LIST OF PARTS



4 x Shelves




6 x Corner Braces



4 x End Caps



8 x Leg Pieces



Nuts & Bolts

## Tools required

1. Phillips Head Cordless Screwdriver
2. 8mm Spanner

### ! WARNING

Be careful while handling metal edges


### IMPORTANT

Do not fully tighten nuts and bolts until unit assembly is completed

# ASSEMBLY INSTRUCTIONS

- 1 Using one shelf only, attach the 6 corner braces to the underside (This shelf will be used in Step 5).


At this point: Only insert one bolt and nut per brace as shown by the arrows

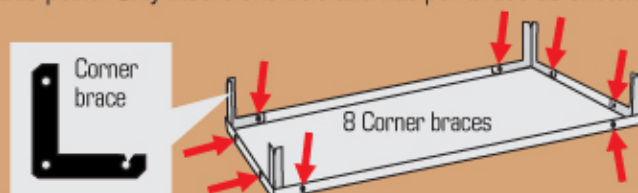

At this point: Only insert one bolt and nut per brace as shown by the arrows


- 2 Using the 8 leg pieces, create 4 leg lengths by joining 2 leg pieces together. Important: You must overlap 2 holes of both leg sections.

2 Leg pieces overlapped and bolted together

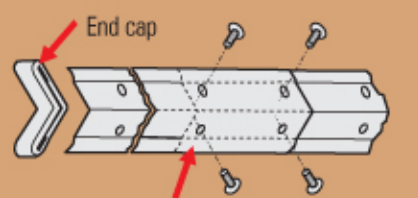


2 leg pieces overlapped and bolted together

- 3 Lay 2 leg lengths on a flat surface and place a shelf inside both leg lengths at the top hole. Insert bolts into the 4 holes and secure with nuts.

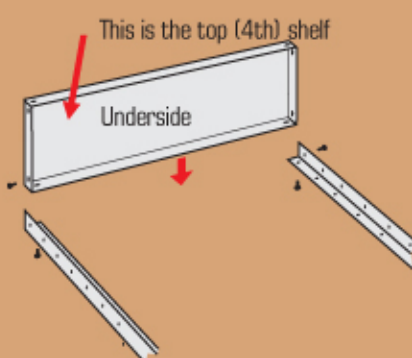


- 4 Repeat Step 3, adding a shelf to the second last holes at the other end of the 2 leg lengths.

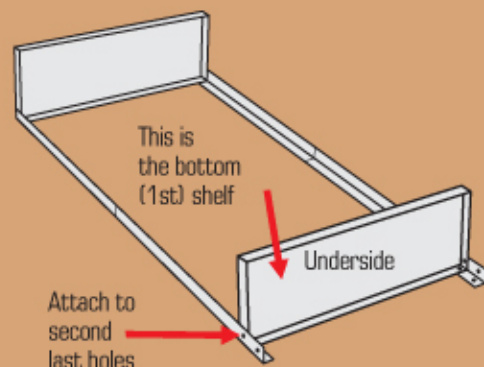

- 5 Now attach the 3rd shelf. Note: This is the shelf that you attached the corner braces to in step 1.


For evenly spaced shelves leave 7 holes vacant

Important: Ensure nuts & bolts are included to all holes in braces

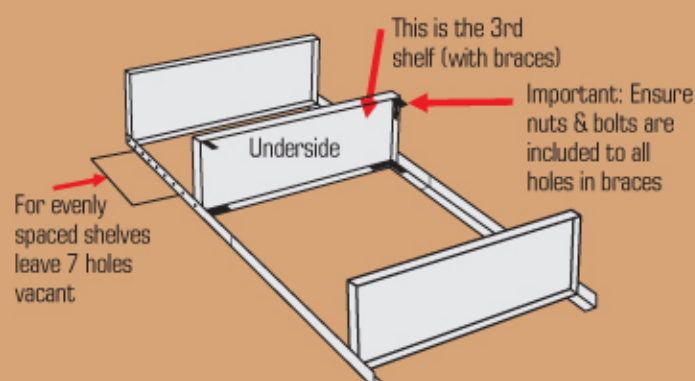


- 6 Now attach the final (2nd) shelf leaving 8 holes vacant between this shelf and the bottom (1st) shelf.

For evenly spaced shelves leave 8 holds vacant

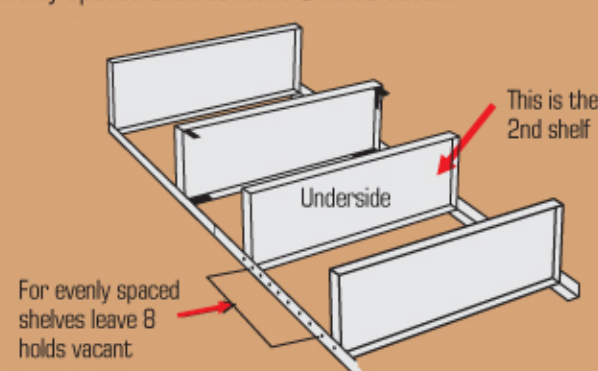

- 7 With the unit still lying down, add the remaining 2 leg pieces, ensuring the correct location of holes on legs are used.

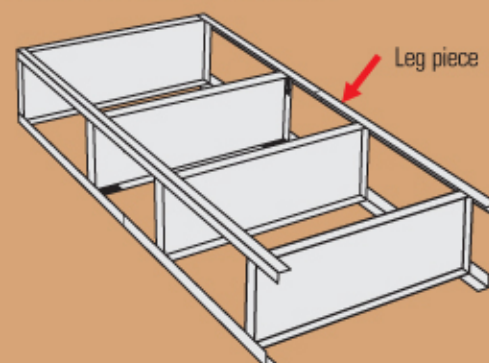


- 8 Stand unit up on its top (4th) shelf — This makes it easier to tighten the nuts and bolts. See Diagram 8

Important tip: Use an 8mm spanner and cordless screwdriver to ensure maximum tightness.

Note: Tighten the 8 nuts and bolts on the bottom (1st) shelf only. Then make sure the unit is vertical from all angles.

Proceed with tightening all the nuts and bolts.

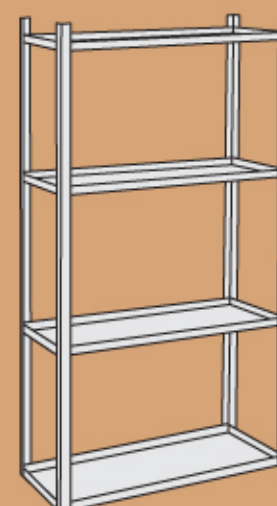

- 9 Add 4 plastic end caps to bottom of legs. Then turn unit onto its feet.

